

BIGPOS[®] 2150

무인 셀프 서비스 키오스크



특장점

- 21.5인치 풀 HD 터치 스크린 디스플레이 키오스크
- Intel[®] Core[™], Pentium[®], Celeron[®] 프로세서 탑재
- 윈도우와 안드로이드 운영체제 지원
- 프린터, 바코드 스캐너 기본 장착
- 옵션형 MSR/SCR, 카메라, NFC/RFID 리더 지원
- 상·하단 분리 가능한 모듈형 설계로 손쉬운 설치 가능
- 내부 부품 접근 용이성으로 편리한 유지 보수 가능
- 매장 환경에 적합한 거치 방식 선택 가능 (바닥, 벽면, 카운터 위)
- 컴팩트하고 슬림한 디자인
- 고객 요구 사항 맞춤형 옵션 기능 제공


Specifications

	Windows	Android	
System	Processors	Intel [®] Core [™] i5-7200U (3M Cache, 2.50/3.10 GHz(Turbo), 2 Cores) Intel [®] Pentium [®] 4415U (2M Cache, 2.30 GHz, 2 Cores) Intel [®] Celeron [®] 3965U (2M Cache, 2.20 GHz, 2 Cores) Intel [®] Celeron [®] J1900 (2M Cache, 2.0/2.42 GHz(Burst), 4 Cores), Fanless	Cortex [™] - A17 Quad-Core (Up to 1.8GHz)
	Chipset	7200U/4415U/3965U Intel [®] Kaby Lake J1900 Intel [®] Bay Trail	
	Memory	7200U/4415U/3965U 4GB Standard, DDR4 2133 MT/s, Socket 1 x SODIMM (Max. 16GB) J1900 4GB Standard, DDR3L 1600 MT/s, Socket 1 x SODIMM	1GB Standard, DDR3L 1600 MT/s, On-board (Max. 2GB Optional)
	Storage	7200U/4415U/3965U SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI J1900 SATA 2 (3Gb/s) 2.5 inch SSD 64GB, Support AHCI (Celeron)	eMMC 8GB, On-board (Max. 64GB Optional)
	Operating Systems	7200U/4415U/3965U Windows 10 IoT Enterprise J1900 Windows 7, Windows 8.1, Windows 10 IoT Enterprise, POS Ready 7	Andoird 7.X (Nougat)
	Audio	Realtek ALC662-VD	Realtek ALC5640
Display	Type	21.5" TFT LCD, LED Backlight	
	Resolution	1080 x 1920	
	Brightness	300 cd/m ² (typ.)	
	Touchscreen	Projected Capacitive Touch	
	Response	12 ms	
	Contrast Ratio	3000 (typ.)	
Interface	USB	7200U/4415U/3965U 6 (Rear 2, Back 4, USB 3.0 x 2, USB 2.0 x 4) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45 J1900 6 (Rear 2, Back 4, USB 2.0 x 6) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	6 (Rear 2, Back 4, USB 2.0 x 6) 3 (Reserved for MSR, SCR/Touch Controller/Camera), RJ-45
	Serial	6 (COM 1 with 5V/12V Power Output on 9 Pins, BIOS, Reserved for NFC) (COM2~3 RJ-45, Full Signal), Reserved for Cash Module) (COM4 RJ-11, Only TX/RX, 12V Power Output, Reserved) (COM5 Reserved for Printer) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR, IC Card)	
	LAN	1 x Gigabit Ethernet, RJ-45	
	Power DC-IN	1 x (3 Pin Connector)	
	Power Supply	Adaptor 24V, 6.35A	
Pedestal	Material	Galvanized Steel Plate	
	Material Thickness	1.2T	
	Component Access	Security Locks with 7-Pin Tumbler / Rear Security Door	
Physical & Environmental	Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity	
	Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity	
	Dimensions (W x H x D)	System : 36 x 76 x 12 cm, 14.1 x 30 x 4.7 in Pedestal : 36 x 89 x 12 cm, 16.9 x 35 x 4.7 in Baseplate : 54 x 1 x 42cm, 21.2 x 0.39 x 16.5 in	
	Packing Dimensions (W x H x D)	System : 50 x 88 x 24 cm, 19.7 x 34.6 x 9.4 in Pedestal : 50 x 100 x 24 cm, 19.7 x 39.3 x 9.4 in Baseplate : 57 x 5 x 45cm, 22.4 x 1.97 x 17.7 in	
	Net Weight	System : 11.8Kg Pedestal : 10.0kg Baseplate : 12.5Kg	
	Packing Weight	System : 15.7Kg Pedestal : 13.8Kg Baseplate : 13.5Kg	
	Certification	CE, FCC, KC	
	Color	High Gloss White, High Gloss Black, Custom Colors Available	

*제품 외관 등은 실제 제품과 차이가 있을 수 있으며, 사양은 업그레이드를 위해 사전 통보 없이 변경될 수 있습니다.

Basic Built-in Options	Built-in Printer	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)	
	Barcode Scanner	1D, 2D Barcode	
Options	Storage	2.5 inch SSD 128GB, HDD 500GB, 1TB	
	Camera	2M USB Interface (Internal) (Factory Option)	
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track	
	Smart Card Reader	EMV Level 1, 2	
	NFC Reader	MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693	
	Wall Mount Kit	VESA-Compatible, 100 x 100 mm, 200 x 200 mm	
	Speaker	2 x 5W (Stereo) (Factory Option)	
	WiFi	Mini PCIe for Wireless LAN (Core/Pentium) USB Dongle (Celeron)	On Board (Factory Option)
Custom Options	Customer-Assigned EMV Terminal Bracket, Bill/Coin Acceptor, Document Reader (Passports/IDs), Ticket/Document Printer, UPS (Uninterruptible Power Supply)		

*제품 외관 등은 실제 제품과 차이가 있을 수 있으며, 사양은 업그레이드를 위해 사전 통보 없이 변경될 수 있습니다.

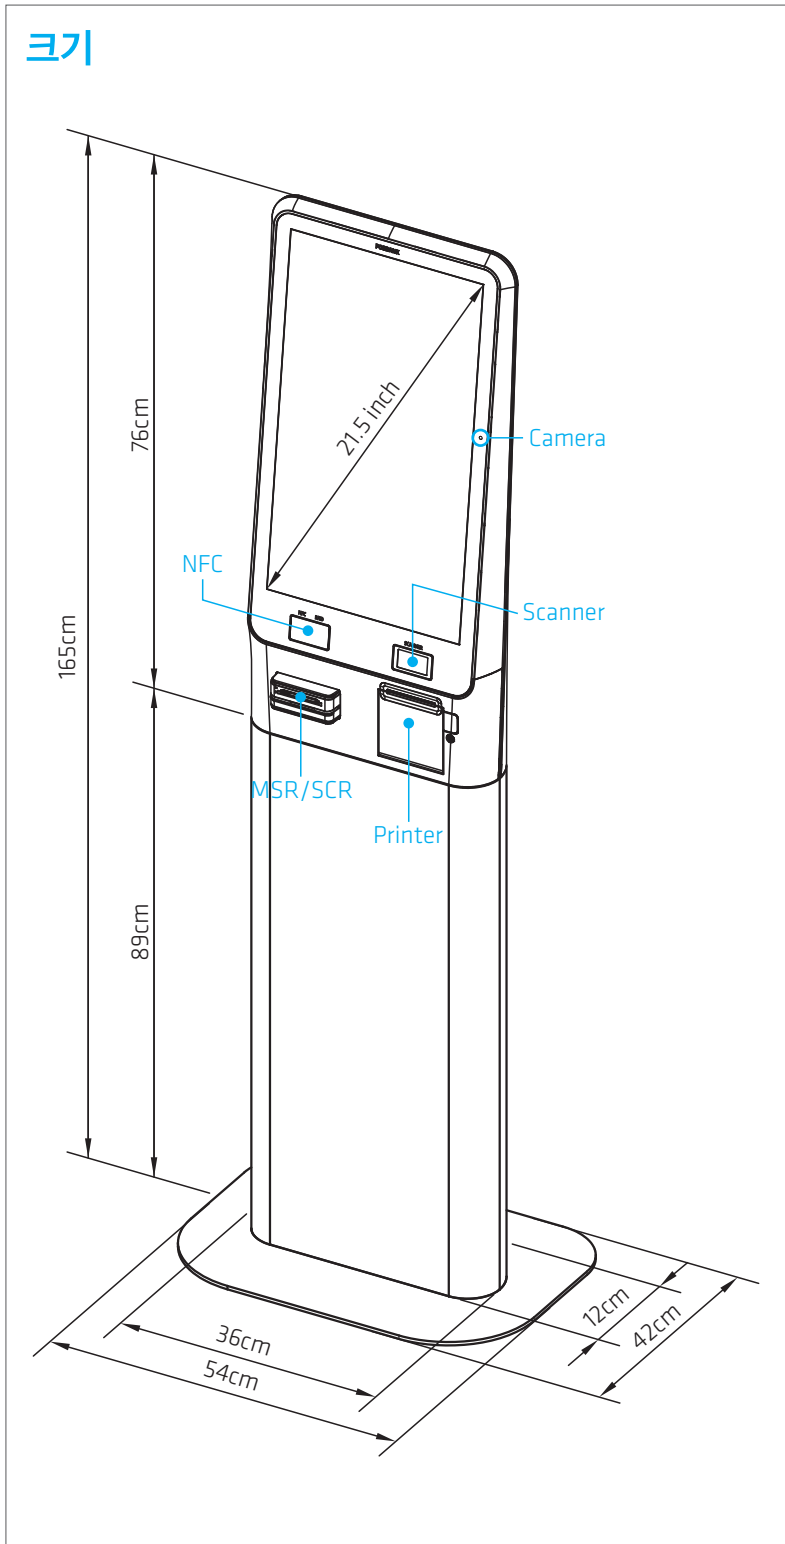

용도

- 유통 매장 및 숙박업 키오스크
- 외식업 무인 주문 및 결제 키오스크
- 티켓 판매 및 주차 정산 키오스크
- 병원 등록 수납 처방전 발행 키오스크

기본사양



프린터


- 3", 250 mm/s의 빠른 속도, 오토 커터 기능



바코드 스캐너

- 1D, 2D Barcode

옵션

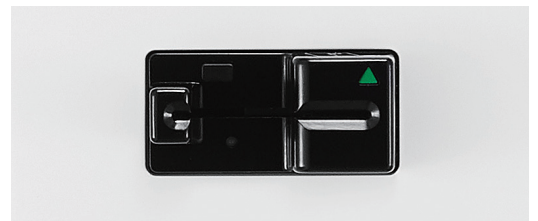

결제

- 최신 보안 모듈 MS/IC 리더기 지원
- 현금 처리 모듈 지원



NFC/RFID 리더

- MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693